


**FLAMECUT
CARBO™**

With the KOBRA hardness standards, extremely high hardness can be achieved and thus particularly robust and wear-resistant concrete block molds can be produced. Different hardening processes are used, depending on the mold technology, to help to achieve smooth production processes.

**DESIGN
WITH
MOLDS.**

**EXPERTISE
AT YOUR SIDE.**

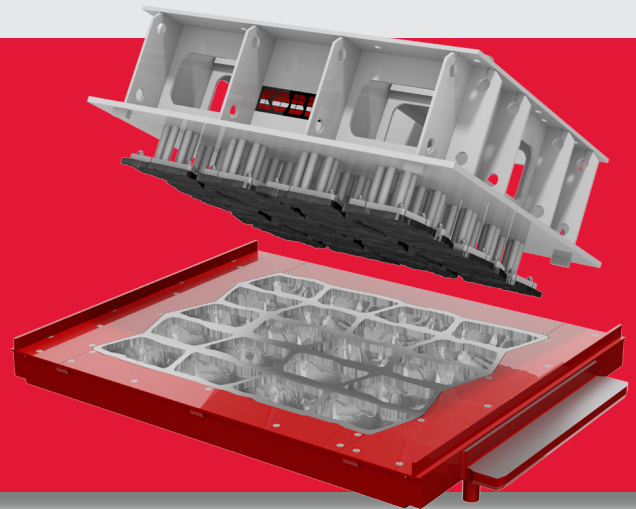

TOOLS. Molds. Driven by knowledge.

CARE. Service.



**EXPERTISE
AT YOUR SIDE.**

»Flamecut carbo™«

»Flamecut carbo™« MOLD is particularly suitable for rustic briquet and tumbled paver blocks, in which service life is prioritized over perfect dimensional accuracy. The mold inserts are completely flame cut and all block contours are polished by hand.


The disadvantages of conventionally flame-cut molds are eliminated by the carbo hardening process, which doubles the protective effect of the mold casing by an all-round hardness depth of 1.2mm.

**WE ARE
HERE FOR YOU.**

FORM 
Flamecut carbo™

Facts & advantages:

- » Hardness and wear resistance due to the carbo hardening process
- » Hardness quality 62+2/-0 HRC
- » Homogeneous hardness depth 1.2mm
- » Suitable for rustic briquet and tumbled pavers

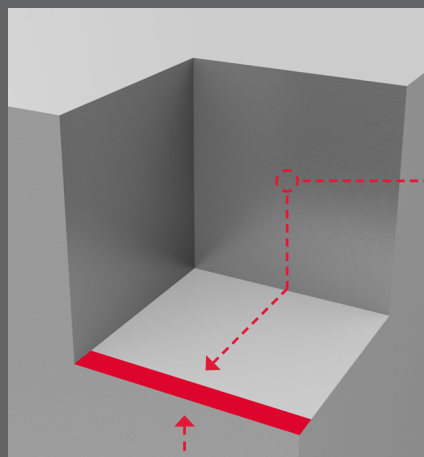

**Hardness quality 62 HRC
Hardness depth 1.2mm**